


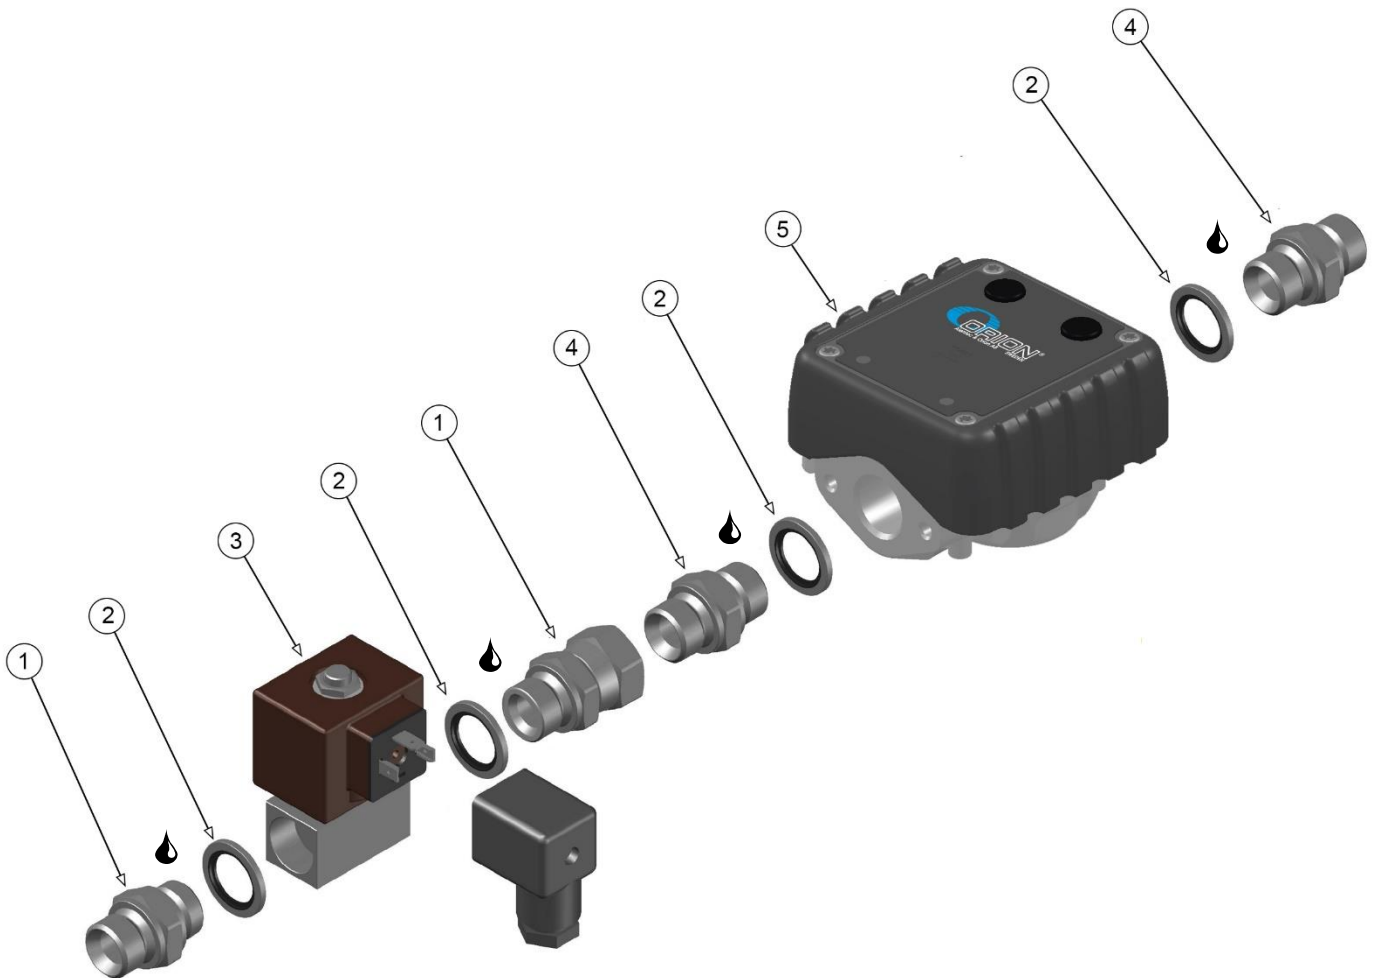

Rostfritt mätverk med 328 pulser/liter och ½" magnetventil
 Stainless in-line meter with 328 pulses/litre and ½" solenoid valve

G1/2M OUT ►

IN ► G1/2M

Vikt/ Weight:	2 Kg
Max arbetstryck/Max work pressure	1 MPa, 10 bar

 = Flytande Tätningsmedel vid alla gänganslutningar
 = Liquid sealant at all thread points

Benämning / Description				Antal Quantity	Art.nr. Part. No.
Pos.	1	Nippelsats med avkortade gängor, 1st Hane-Hane 1st Hona-Hane Adapter kit with shortened threads 1pc Male-Male 1pc Male-Female G1/2"		1	2832701
Pos.	2	Gummistålbricka / Rubber steel washer GBR1/2"		4	10103526
Pos.	3	Magnetventil/ Solenoid valve G1/2F, 24V= / 24V DC		1	28327
Pos.	4	Nippel / Adapter G1/2M – G1/2M		2	78020808
Pos.	5	Mätverk 328 pulser per liter/ In-Line meter 328 pulses per litre, G1/2M – G1/2M		1	25061